


## FREQUENCY INDEPENDENT DATA

Description: directional yagi  
 Frequency: 690-960 MHz  
 Impedance: 50 ohm  
 Gain: 6/7 dBi  
 H -3 dB: 158/124°  
 E -3 dB: 76/68°  
 F/B: 15/26 dB  
 Polarization: vertical/horizontal/slanted  
 Connector: N-/ TNC-/ 7/16-female  
 VSWR: < 1.5  
 Radome: UV resistant ABS, RAL 7012, PU foam filling


Radiator: copper  
 Passive elements: coated aluminium  
 Attachment: Ø 35-60 mm, aluminium alloy bracket, stainless steel V-bolts and self-locking nuts

Lightning protection: DC-short circuited  
 Temperature: -40°C - +80°C  
 IP: 67

- broadband design for LTE700, LTE800, LTE850 and LTE900
- covers LTE bands 5, 8, 12, 13, 14, 17, 18, 19, 20, 26, 28, 29, 67, 85, 103, 106
- combination of durability, light weight and low wind load
- radome enclosed radiator
- IP67 proof construction
- all electromechanics moulded inside of closed cell PU foam
- DC shorted feed point
- integrated impedance compensation
- integrated RF choke

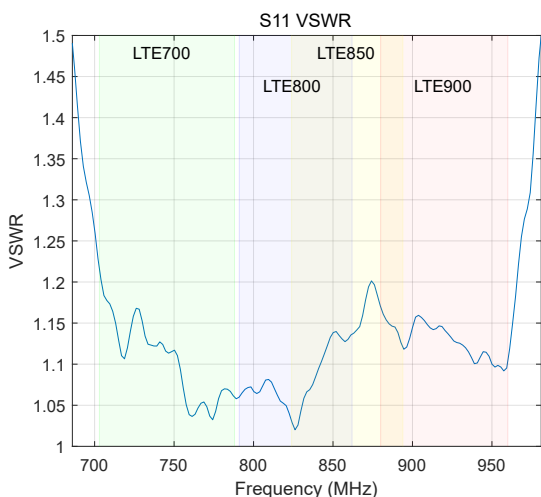


Radiation Pattern 757.5 MHz

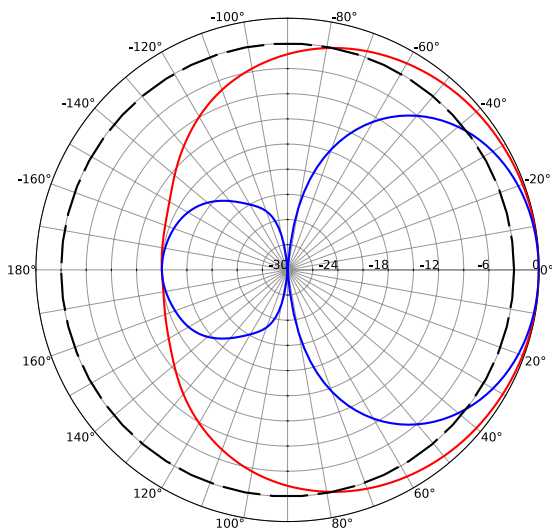

— H dB — E dB  
 HCM 079LA18 038EA00

Radiation Pattern 892.5 MHz

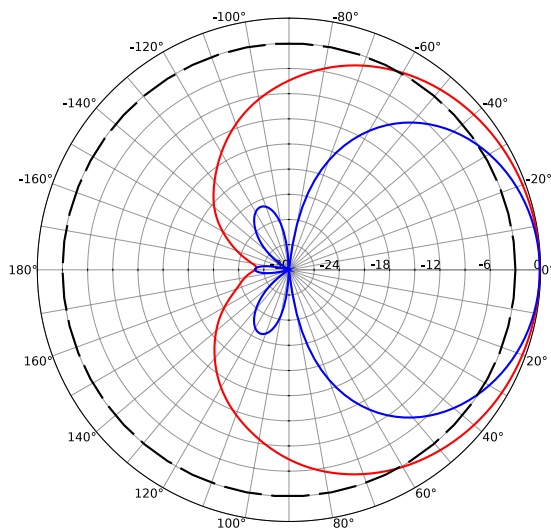

— H dB — E dB  
 HCM 062LA05 034EA00



**RoHS**  
COMPLIANT

**CompleTech**  
ComAnt<sup>®</sup> -antennas by CompleTech, Finland