


Frequency	690~960MHz
	1710~2170MHz
	2.5G~2.7G
	3.3G~3.8G
V.S.W.R	2.2:1
Impedance	50Ω
Gain	4 dB

ROHS
 ISO 9001
 ISO 14001

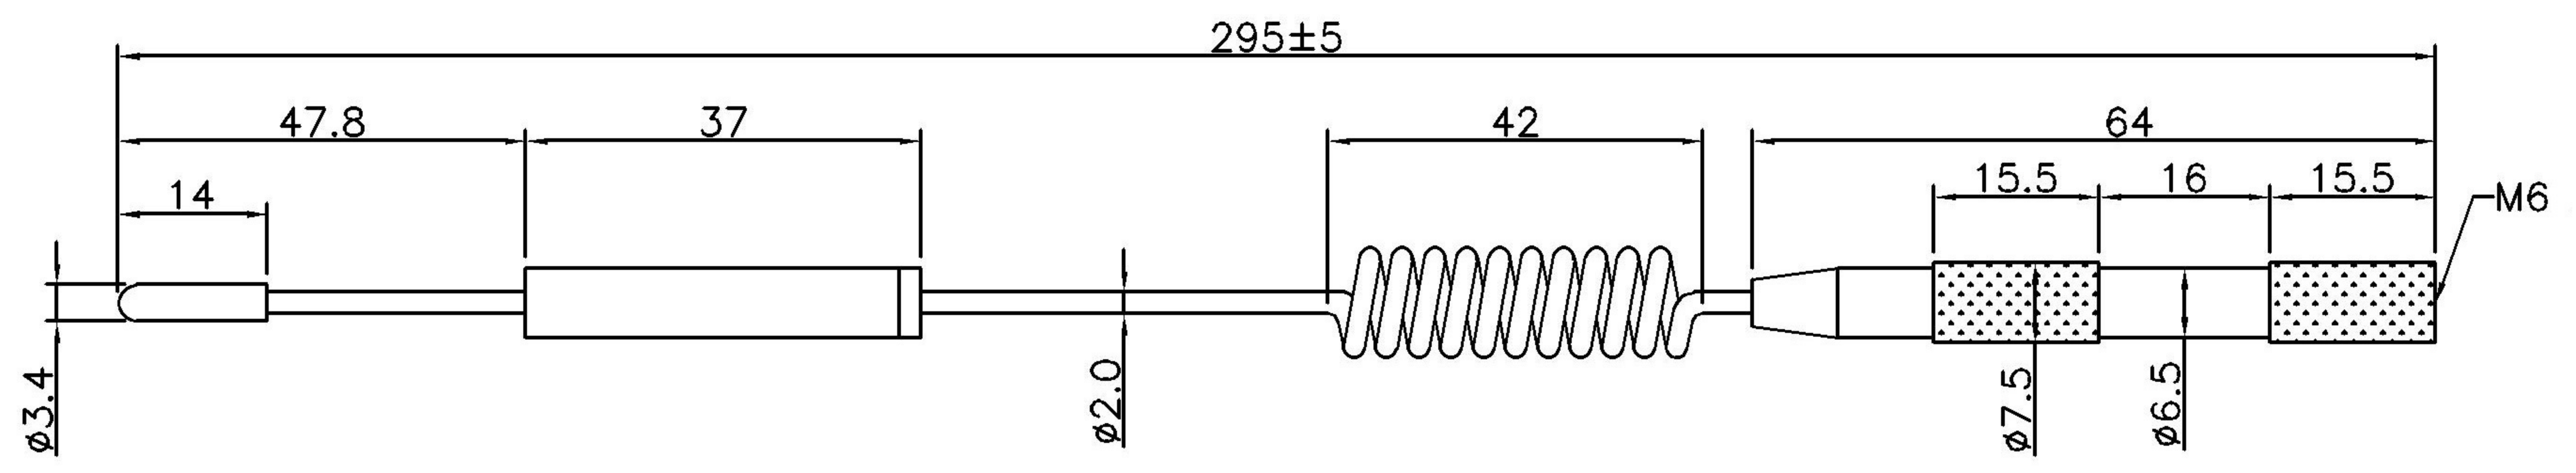

Material:		Treatment:					
Drawer	Design	Aprov	Tolerance	Unit: mm		TITLE	202-065
			X=±0.5 .X=±0.2 .XX=±0.1 .XXX=±0.05	Ver: A	Scale 1:1	Model NO	
NO	DESCRIPTION	MATERIAL / FINISH	Q'TY	File NO: QR0402	Drawing NO	501-M98-101	
Part NO							